



Europäisches Patentamt
European Patent Office
Offic européen des brevets



(11) Publication number : **0 654 684 A3**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : 94308390.7

(22) Date of filing : 14.11.94

(51) Int. Cl.⁶ : **G01T 1/29, G01T 1/164,
G21K 1/10**

(30) Priority : 19.11.93 US 155015

(43) Date of publication of application :
24.05.95 Bulletin 95/21

(84) Designated Contracting States :
DE FR GB NL

(88) Date of deferred publication of search report :
06.09.95 Bulletin 95/36


(71) Applicant : PICKER INTERNATIONAL, INC.
595 Miner Road
Cleveland, Ohio 44143 (US)

(72) Inventor : Morgan, Hugh T.
1040 W. Mill Drive
Highland Heights, Ohio 44143 (US)
Inventor : Thornton, Bryce G.
7352 Holly Park Drive
Concord, Ohio 44060 (US)

(74) Representative : Pope, Michael Bertram
Wingate
The General Electric Company, p.l.c.
GEC Patent Department
Waterhouse Lane
Chelmsford, Essex CM1 2QX (GB)

(54) Nuclear camera systems.

(57) A nuclear camera system, e.g. for medical diagnostic imaging, comprises a plurality of radiation detector heads (10a, 10b, 10c) mounted on a rotatable portion (16) of a gantry (18). A transmission radiation source and collimator assembly (40, 42) is mounted on the rotatable gantry portion opposite one of the detector heads. The radiation source (60) of the assembly is mounted in a lead shield (62) with an opening (64) pointing toward an examination region (12). A shutter (66) is rotatable between a closed position in which a lead arc segment (70) blocks the opening (64), a calibration orientation in which tin (72) covers opening (64), and an open position in which an opening (74) is aligned with the opening (64). A safety interlock means (80) locks the shutter in the closed position and against rotation when the radiation source and collimator assembly is removed from the rotatable gantry portion. The collimator (42) has lead side walls (200) and tin or tin alloy septa (202). When the radiation from the radiation source strikes the lead side walls, they emit characteristic lead x-rays of about 88 keV whereas the tin radiates x-rays of only about 30 keV. A filter (210) includes an inner layer (212) of tin for attenuating any remaining 88 keV lead x-rays coming from the transmission line source assembly and converting them to about 30 keV radiation. The filter has an outer layer (214) for attenuating the radiation around 30 keV.

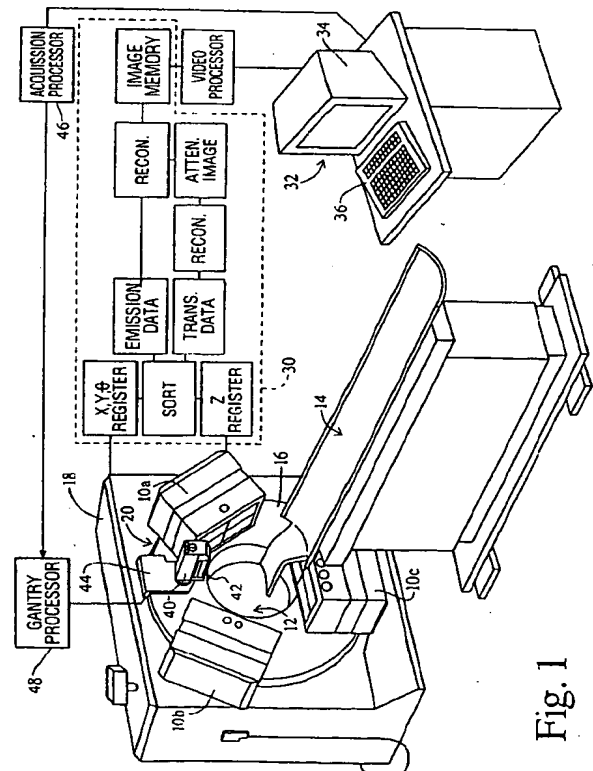

EP 0 654 684 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 94 30 8390

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	EP-A-0 056 552 (THOMSON CSF) 28 July 1982 * page 4, line 1 - line 9 * * claim 1 *	1-6, 11-14	G01T1/29 G01T1/164 G21K1/10
Y,D	EP-A-0 526 970 (PICKER INT INC ; UNIV UTAH (US)) 10 February 1993 * the whole document *	1-6, 11-14	
Y	US-A-5 033 074 (COTTER DANIEL J ET AL) 16 July 1991 * abstract * * column 4, line 19 - column 8, line 64 * * figure 1 *	1-6, 12-14	
A	EP-A-0 279 476 (PILLAY M ; MENON R S (NL)) 24 August 1988 * column 1, line 5 - column 3, line 9 * * figures *	1,5,14	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			G01T G21K
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 12 July 1995	Examiner Datta, S
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons Δ : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (01.92) (P04011)